

ROOTT C

Cement & telescopic retained


One-piece implant

Simple solution to bone atrophy



One-piece implant for more comfort and simplicity with a bendable neck for up to 15°. It ensures extreme time and cost-saving, which also comes with less complications and more patient acceptance.

Due to its thin design, excellent fit for narrow ridge and ensured safety due to the alveolar canal nerve bypass. Developed for single and multiple restorations.

Condensing thread

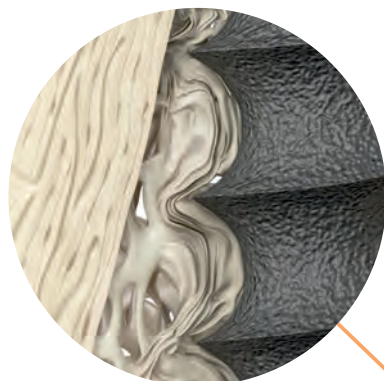

Avoiding inferior alveolar canal nerve

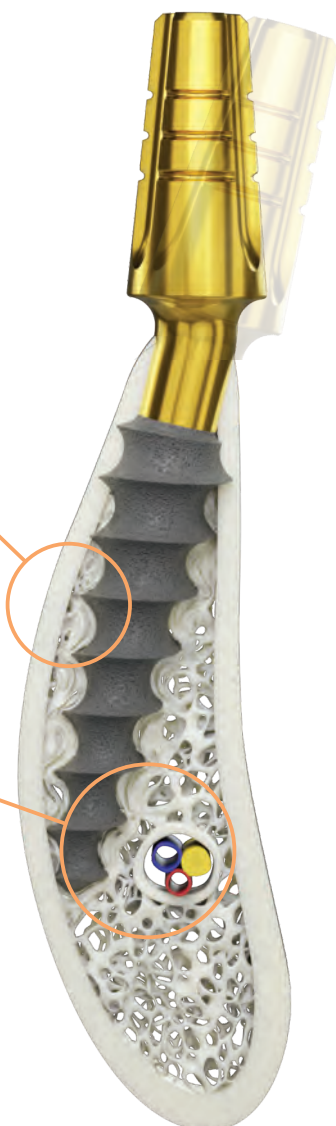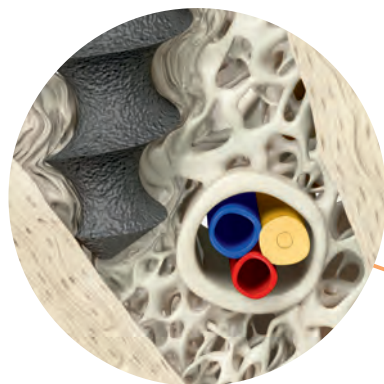

ROOTT C




Together with special condensing threads and embedded abutment with no microgaps, implant achieves excellent initial stability from the very beginning.


ROOTT C

 Significant time & cost saving

 Immediate loadings

 Excellent for narrow ridge

 May avoid bone augmentation

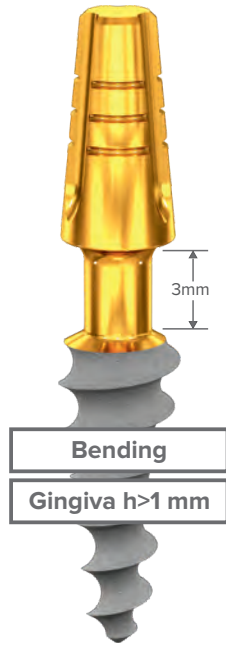

Prosthetic variety

Cement retain with trimmable external platform, burnouts or cement-free option with patented telescopic abutments.

Telescopic



Easy management




Clinical cases



By Dr. Alvaro Bastida


“FILO System is suitable in all clinical cases. Even esthetic area, narrow spaces, post-extraction and soft tissues management”

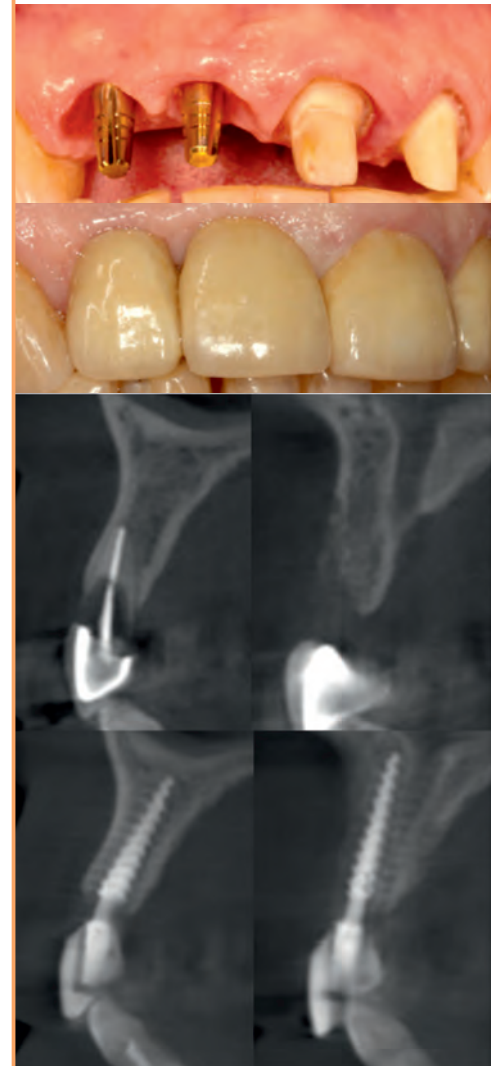

More cases



ROOTT C

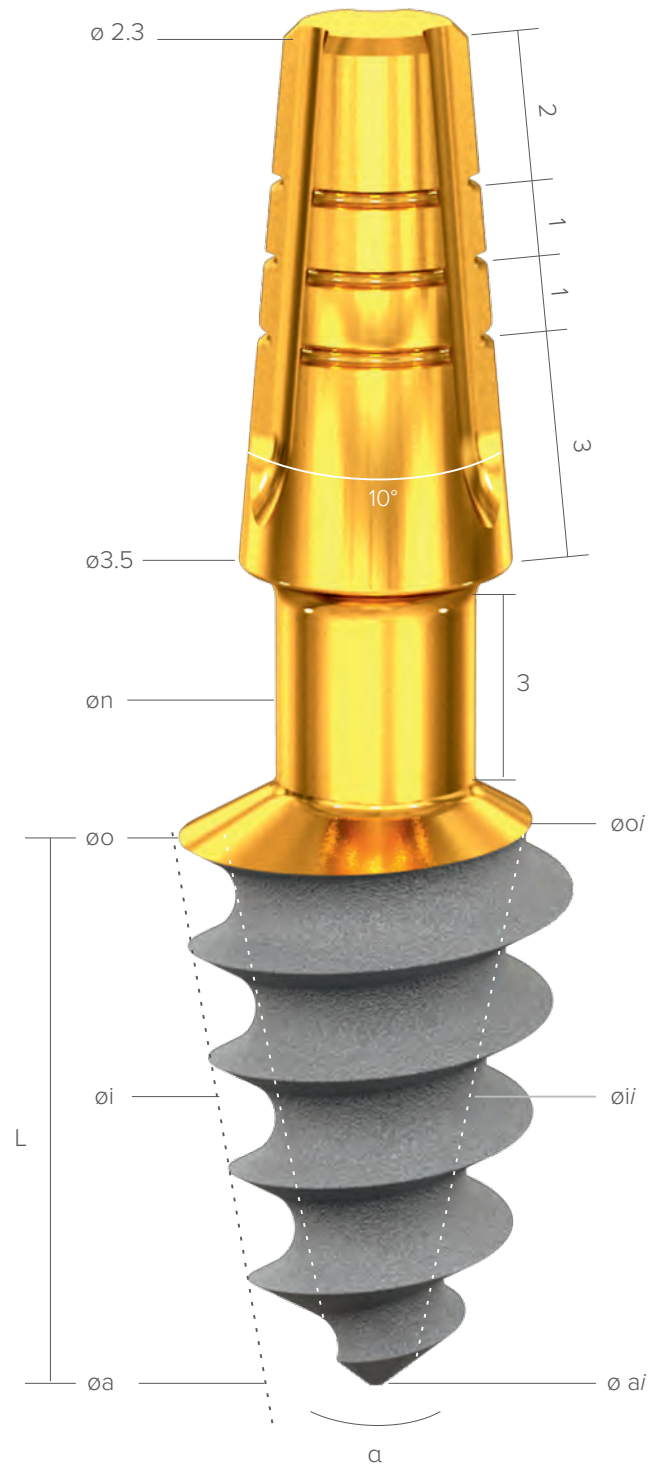

o - occlusal diameter (mm); i - intraosseous diameter (mm); a - apical diameter (mm); n - neck diameter;
 α - total internal angle (°); s - intraosseous square area (mm²); i = internal.


L / o	ø 3.0	ø 3.5	ø 4.0	ø 4.5	ø 5.0	ø 5.5	ø 6.5	ø 7.5	ø 8.5
	oi 2.05 n 2.05	oi 2.46 n 2.05	oi 2.95 n 2.05	oi 3.05 n 2.35	oi 3.55 n 2.35	oi 4.04 n 2.55	oi 4.0 n 2.55	oi 4.0 n 2.55	oi 4.04 n 2.55
6 mm	 C3006 2.4 1.4 1.9 0.9 45 12	 C3506 2.6 1.6 1.9 0.9 49 17	 C4006 3.1 2.0 2.4 1.2 59 18	 C4506 3.5 2.1 2.9 1.4 73 18	 C5006 3.9 2.4 3.2 1.7 82 21	 C5506 4.1 2.7 3.2 1.8 88 27	 C6506 5.1 2.6 4.5 1.9 126 27	 C7506 6.1 2.3 5.8 2.6 144 27	 C8506 7.1 2.7 7.1 2.6 158 26
8 mm	 C3008 2.4 1.4 1.9 0.9 59 19	 C3508 2.6 1.6 1.9 0.9 65 13	 C4008 3.1 2.0 2.4 1.2 80 13	 C4508 3.6 2.2 2.9 1.4 100 13	 C5008 4.0 2.5 3.2 1.8 113 15	 C5508 4.2 2.7 3.2 1.8 121 19	 C6508 5.2 2.7 4.4 1.9 177 19	 C7508 6.2 2.6 5.6 2.1 208 19	 C8508 7.2 2.7 6.7 2.3 231 19
10 mm	 C3010 2.4 1.4 1.9 0.9 74 7	 C3510 2.6 1.6 1.9 0.9 82 10	 C4010 2.9 1.8 1.9 0.8 92 13	 C4510 3.4 1.9 2.4 1.0 117 13	 C5010 3.7 2.2 2.6 1.2 131 15	 C5510 3.8 2.4 2.5 1.0 139 19	 C6510 4.9 2.4 3.6 1.2 211 19	 C7510 5.8 2.7 4.5 2.4 251 19	 C8510 3.8 2.4 2.5 1.0 287 19
12 mm	 C3012 2.3 1.3 1.7 0.7 86 16	 C3512 2.6 1.6 1.8 0.8 97 19	 C4012 2.8 1.8 1.8 0.8 109 11	 C4512 3.3 1.9 2.4 0.9 139 11	 C5012 3.8 2.4 2.8 1.4 163 12	 C5512 3.9 2.5 2.5 1.1 167 16	 C6512 4.9 2.4 3.6 1.2 258 16	 C7512 5.9 2.4 4.8 1.3 309 16	 C8512 6.9 2.4 5.9 1.4 357 16
14 mm	 C3014 2.4 1.3 1.9 0.7 99 15	 C3514 2.6 1.5 1.8 0.7 111 8	 C4014 2.9 1.8 1.8 0.8 128 10	 C4514 3.3 1.9 2.3 0.9 162 10	 C5014 3.6 2.2 2.4 0.9 179 12	 C5514 3.8 2.3 2.3 0.8 191 14	 C6514 4.8 2.4 3.4 0.9 297 14	 C7514 5.8 2.4 4.5 1.1 359 14	 C8514 6.8 2.4 5.6 1.2 415 14
16 mm	 C3016 2.4 1.4 1.7 0.8 118 14	 C3516 2.6 1.6 1.8 0.8 129 16	 C4016 2.9 1.8 1.8 0.8 146 8	 C4516 3.3 1.9 2.3 0.8 184 9					
18 mm	 C3018 2.4 1.3 1.7 0.7 128 14	 C3518 2.6 1.7 1.8 0.8 146 16	 C4018 2.9 1.8 1.8 0.8 164 7	 C4518 3.3 1.9 2.2 0.8 206 8					
20 mm	 C3020 2.4 1.3 1.7 0.7 143 14	 C3520 2.6 1.6 1.8 0.7 161 5	 C4020 2.9 1.8 1.8 0.7 180 7	 C4520 3.3 1.9 2.2 0.8 229 7					

oi | oii
øa | øai
S | a

Ti6Al4V ELI

External platform

Transfers

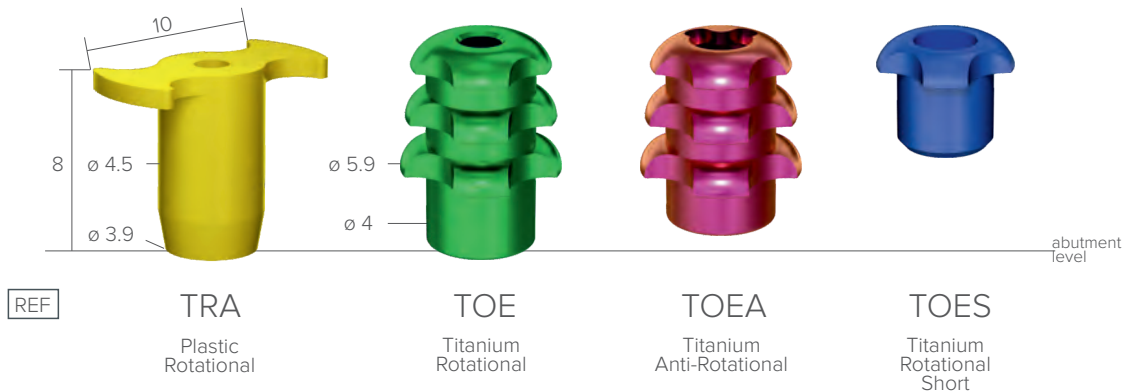


Analogs





Healing abutments



Telescopic abutments, titanium

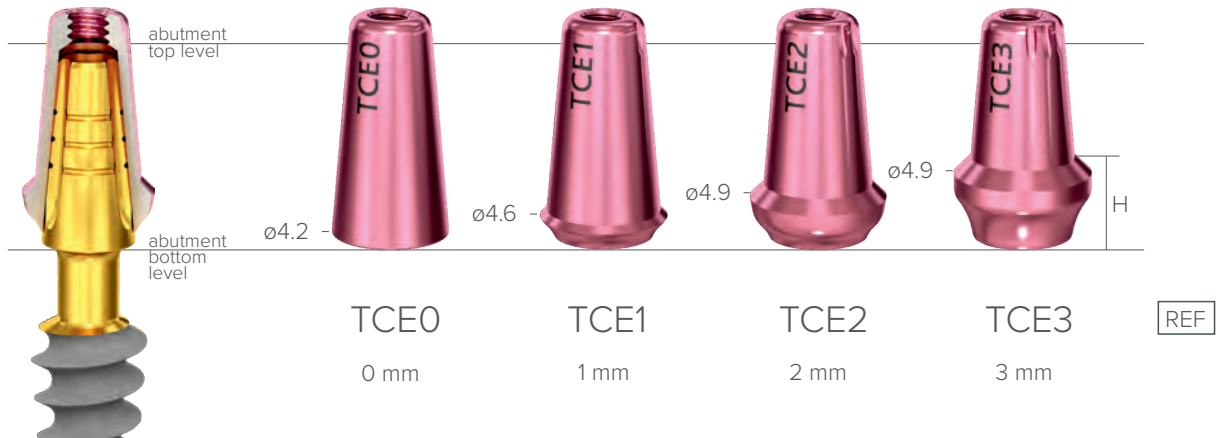

Telescopic abutments, PEEK

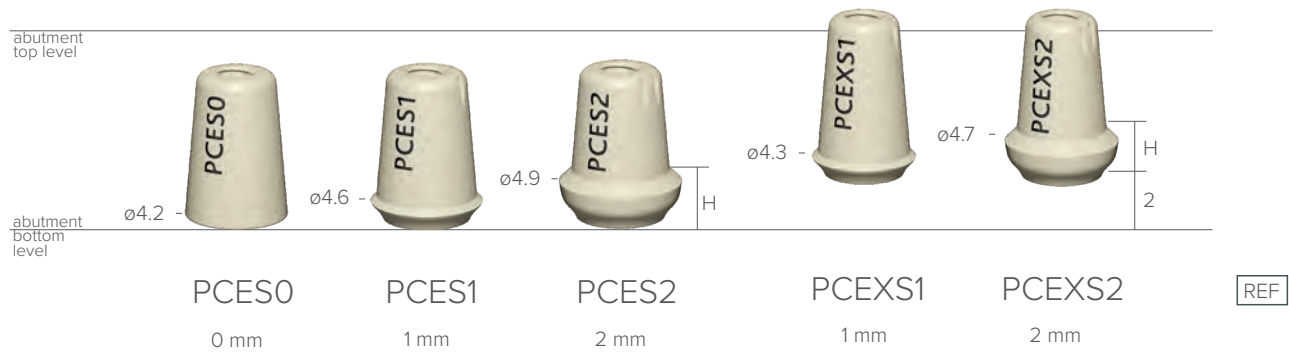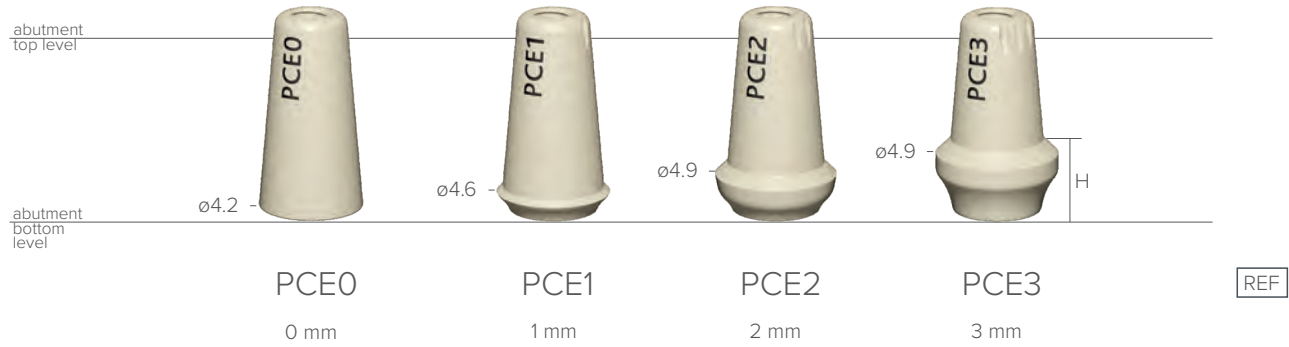

Burn-out abutments

